



VICKY BLANEY
维奇 布兰妮

佛山市维奇建材有限公司

FOSHAN VICKY BLANEY BUILDING MATERIAL CO.,LTD

办公室地址：佛山市禅城区魁奇一路136号2楼

展厅地址：佛山市石湾榴苑路18号

工厂地址：佛山市南海区西樵镇联新工业区

电话：86 757 8633 6256

传真：86 757 6322 5681

邮编：528021

邮箱：info@vickyblaney.com info@vbceramic.com

office:2nd FL.,No. 136 kuiqiyi Rd.,Foshan 528000,P.R.China.

showroom:18 liuyuan Road Shiwan Foshan Guangdong China

Factory: LIANXIN INDUSTRIAL ZONE,XIQIAO,NANHAI DISTRICT,FOSHAN,GUANGDONG,CHINA

website: www.vickyblaney.com

E-mail: info@vickyblaney.com info@vbceramic.com

TEL: 86 757 8633 6256

Fax: 86 757 6322 5681




VICKY BLANEY
维奇 布兰妮

全抛釉 抛光砖

GLAZED POLISHED TILE POLISHED TILE

精品磁砖 维奇建材

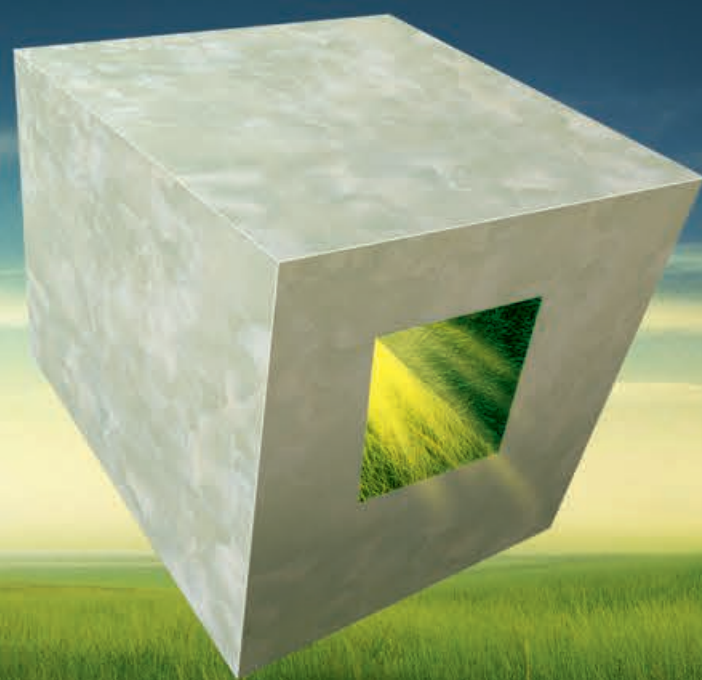

生活之梦 灵性之美

生活就是需要自然灵性之美，才能彰显与众不同的独特魅力；
人心流动在这样的环境中，熏陶平凡。

公司简介 Company Profile

佛山市维奇建材有限公司是一家集科研研发、专业生产、营销为一体的新型现代化企业，公司总部位于陶瓷名都——广东佛山。

自创立以来，维奇建材就始终坚持贯彻国际化品牌战略，用世界的眼光和国际化战略精心缔造一流的品牌与服务。公司引进了世界一流的意大利生产线，包括意大利宽体进口窑炉、高能压机、连续式球磨机为代表世界领先技术的生产设备和工艺技术，日产达9万平方米。主要生产抛光砖、大理石全抛釉、仿古砖、瓷片四大品类；涵盖了200*400mm、300*300mm、400*400mm、300*600mm、600*600mm、800*800mm、600*1200mm、150*600mm、150*800mm、200*1000mm等多种不同规格产品满足客户的不同需求。

自成立以来，维奇建材一直将“以最优质的产品，为社会、客户、企业、员工创造更高的价值！”做为使命，组建了一支高素质的营销队伍，通过不断优化销售渠道、整合信息资源、为合作伙伴提供优质的售前咨询、售中指导、售后跟踪全程的贴心服务，力求客户利益最大化，实现厂商共赢双局面。

FOSHAN VICKY BLANEY BUILDING MATERIAL CO.,LTD. is a research and development, specializing in the production, marketing as one of the new modern enterprise, the company is headquartered in ceramic city - Foshan, Guangdong.

Since its found, Vicky Blaney will always adhere to the international brand strategy, with a world vision and international strategy carefully building a first-class brand and service. The company introduced a world-class production line in Italy, including Italy imports kiln wide-body, high-energy press, continuous ball mill and other representatives of the world's leading technology production equipment and technology, production ability reach to 90,000 square meters per day. The main production of polished tiles, full polished glazed porcelain tiles, rustic tile, kitchen tile and wall tiles, our normal size: 200 * 400mm, 300 * 300mm, 400 * 400mm, 300 * 600mm, 600 * 600mm, 800 * 800mm, 600 * 1200mm, 150 * 600mm, 150 * 800mm, 200 * 1000mm ,so many different product specifications to meet the different needs of customers.

Since its set up, Vicky Blaney has been "to the highest quality products, to create for the community, customers, businesses, employees greater value!" As a corporate mission, set up a high-quality marketing team, through continuous optimization of sales channels, integration of information resources to provide quality pre-sales consulting for partners, sales in the guide, full of intimate after-sale tracking service, and strive to maximize the interests of customers, manufacturers achieve a win-win dual situation.

Glazed Polished Tile

全拋釉系列



耐酸碱
Acid & alkali resistant



耐寒冷
Anti-freeze




防滑
Non-sliping



耐磨
Wear-resisting




应用产品: HS608GN




型号(Model):HS601GN HS801GN 纯白玉
尺寸(Size):600X600mm 800X800mm




型号(Model):HS608GN HS808GN 爵士白
尺寸(Size):600X600mm 800X800mm

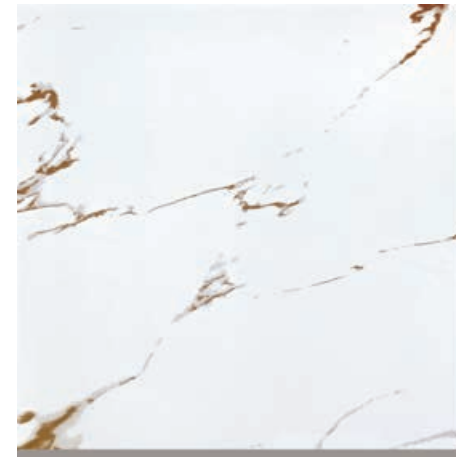


型号(Model):HS620GN HS820GN 雪花白
尺寸(Size):600X600mm 800X800mm

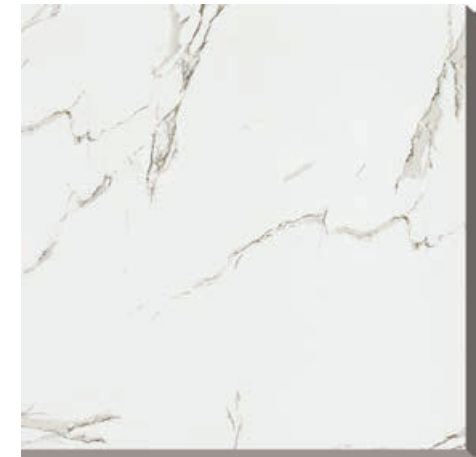

型号(Model):HS615GN HS815GN 爵士白玉
尺寸(Size):600X600mm 800X800mm

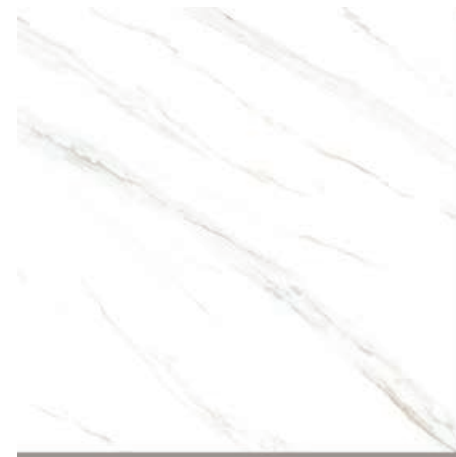

型号(Model):HYH603GN HYH803GN 雅士白
尺寸(Size):600X600mm 800X800mm

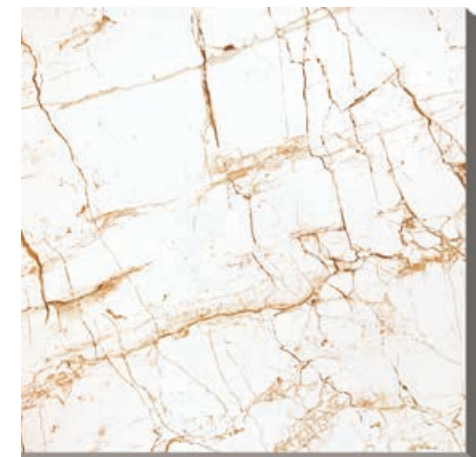

型号(Model):HS637GN 金蜘蛛
尺寸(Size):600X600mm



应用产品: HS606GN




型号(Model):HS624GN
尺寸(Size):600X600mm

白影玉石



型号(Model):HS611GN
尺寸(Size):600X600mm

安娜玉石

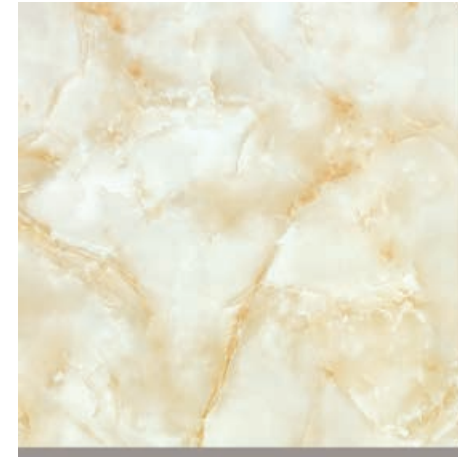

型号(Model):HS652GN HS852GN
尺寸(Size):600X600mm 800X800mm

琥珀玉



型号(Model):HS609GN HS809GN
尺寸(Size):600X600mm 800X800mm

玉兰冰花




型号(Model):HS606GN HS806GN
尺寸(Size):600X600mm 800X800mm

翡翠白



型号(Model):HS602GN HS802GN
尺寸(Size):600X600mm 800X800mm

如意玉

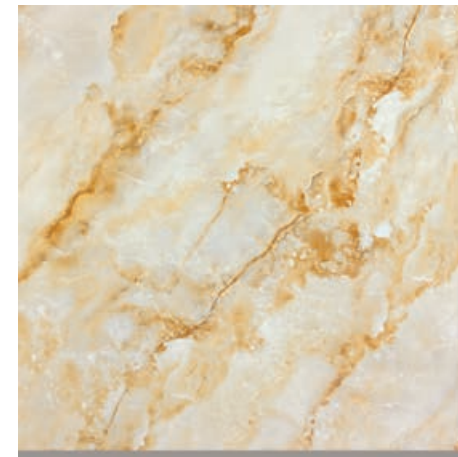

型号(Model):HS605GN HS805GN
尺寸(Size):600X600mm 800X800mm

红根玉



型号(Model):HS607GN HS807GN
尺寸(Size):600X600mm 800X800mm

香槟玉



型号(Model):HS627GN HS827GN 皇家白玉
尺寸(Size):600X600mm 800X800mm




型号(Model):HS603GN HS803GN 白碧玉
尺寸(Size):600X600mm 800X800mm



型号(Model):HS658GN HS858GN 和田玉
尺寸(Size):600X600mm 800X800mm



型号(Model):HS623GN HS823GN 罗莎玉石
尺寸(Size):600X600mm 800X800mm

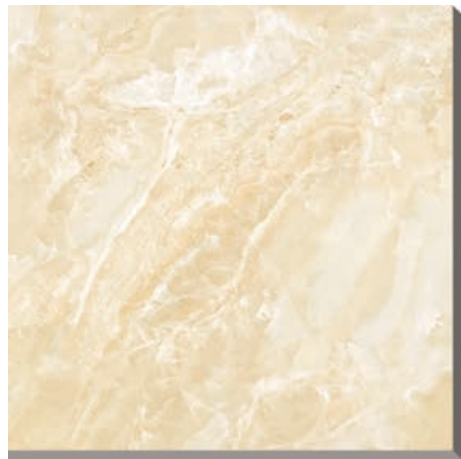

型号(Model):HS634GN 黄金玉
尺寸(Size):600X600mm



型号(Model):HS660GN HS860GN 唯美黄玉
尺寸(Size):600X600mm 800X800mm



型号(Model):HS633GN 凤凰玉
尺寸(Size):600X600mm



型号(Model):HS653GN HS853GN 印度玉石
尺寸(Size):600X600mm 800X800mm



应用产品: HS653GN



应用产品: HS631GN

质感丰富 The texture vividly


弹性化空间运用, 可因应不同需求而产生变化, 从而达到最高使用效益; 每种材质与现代精湛工艺完美结合, 质感丰富而具品质保证, 创造更高的使用价值; 亲人性界而设计, 创造融洽之工作空间, 缓和工作气氛, 充分展现群体之无穷创意。

Tables can be used flexibly in space, and their convertibility can be realized for different needs, so that high efficiency can be achieved. Each kind of wood materials is processed with exquisite modern workmanship. The richness in texture and guaranteed quality create high values for users. Relaxing working atmosphere and fully displaying originality of teamwork, the human-friendly design creates a space, in which the harmonious talks can be held.




型号(Model):HS631GN
尺寸(Size):600X600mm

白雪公主

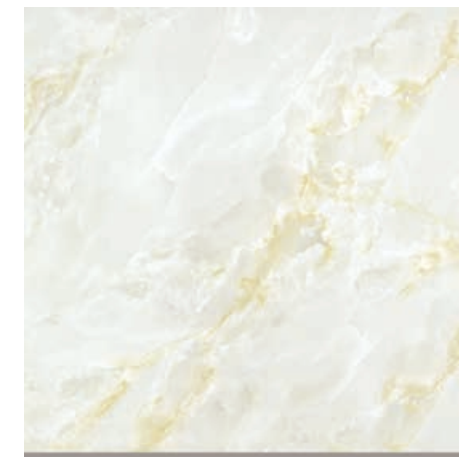

型号(Model):HS625GN HS825GN 翡翠玉
尺寸(Size):600X600mm 800X800mm

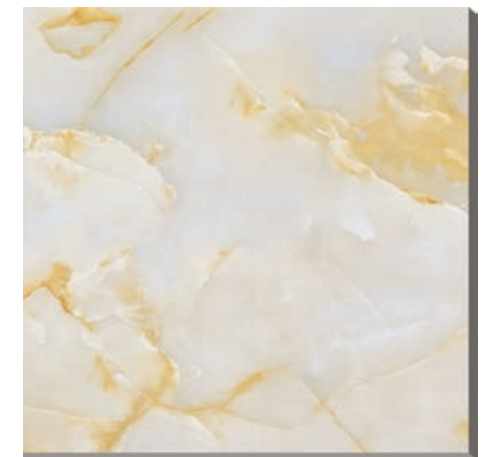

型号(Model):HS676GN HS876GN
尺寸(Size):600X600mm 800X800mm

丰富、轻灵、温情

Richness, lightness, warmth

生活本来就是一个不断寻找、不断回味的过程，它的丰富、轻灵和温情，延伸了这个异度空间的无限遐想，停下来，细细一想，发现幸福其实已不断演绎。

Life is originally a course of constant seeking and tasting. Its richness, lightness and warmth extend the infinite imagination of this exotic space. Stay and think carefully, and you will discover that happiness is actually constantly interpreted.



型号(Model):HS677GN
尺寸(Size):600X600mm



应用产品: HS649GN



型号(Model):HS651GN HS851GN 灰木纹
尺寸(Size):600X600mm 800X800mm



型号(Model):HS672GN 罗马石
尺寸(Size):600X600mm



型号(Model):HS614GN 雨林灰
尺寸(Size):600X600mm



型号(Model):HS671GN 银河石
尺寸(Size):600X600mm




型号(Model):HS649GN 西亚灰
尺寸(Size):600X600mm



型号(Model):HS665GN 澳洲岩石
尺寸(Size):600X600mm




应用产品: HYH607GN

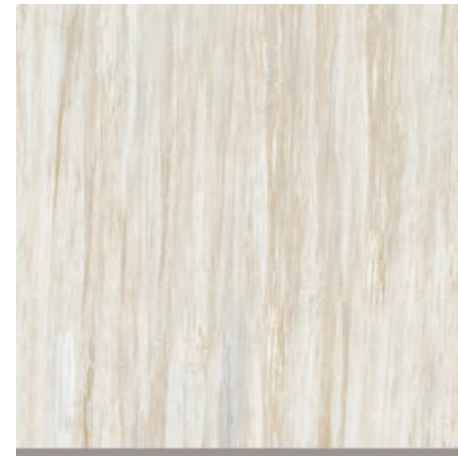

型号(Model):HYH607GN HYH807GN
尺寸(Size):600X600mm 800X800mm



型号(Model):HS670GN 雅丽米黄
尺寸(Size):600X600mm

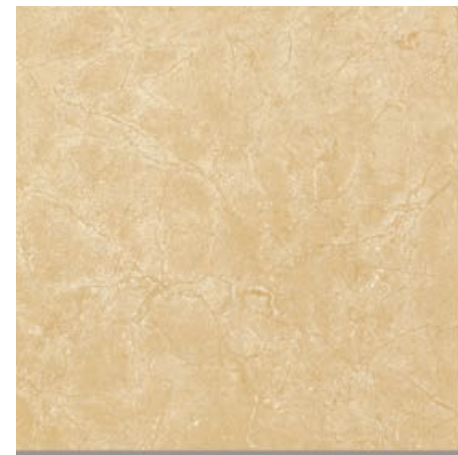

型号(Model):HS645GN 索菲特金
尺寸(Size):600X600mm



型号(Model):HS646GN 奶香玫瑰
尺寸(Size):600X600mm




型号(Model):HS604GN 黄根玉
尺寸(Size):600X600mm



型号(Model):HS644GN 啡钻
尺寸(Size):600X600mm



应用产品: HS636GN

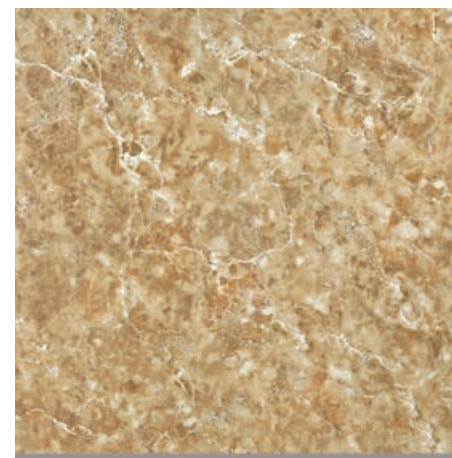

型号(Model):HS656GN
尺寸(Size):600X600mm

金晶啡玉石



型号(Model):HS636GN
尺寸(Size):600X600mm

龙麟石



型号(Model):HS632GN
尺寸(Size):600X600mm

金贵米黄



型号(Model):HS613GN
尺寸(Size):600X600mm


深米黄



应用产品: HS616GN



型号(Model):HS618GN HS818GN 雨林棕
尺寸(Size):600X600mm 800X800mm

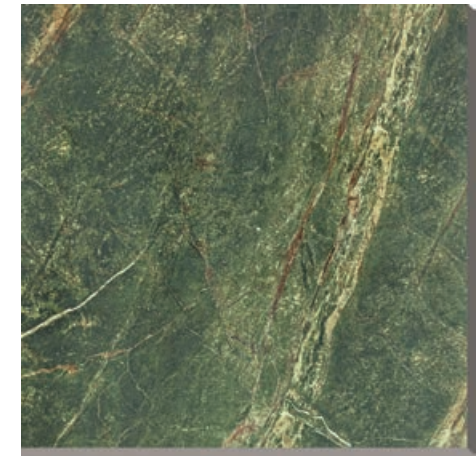

型号(Model):HS616GN 雨林绿
尺寸(Size):600X600mm



型号(Model):HS643GN 龙岩石
尺寸(Size):600X600mm



型号(Model):HS642GN 金砂石
尺寸(Size):600X600mm




型号(Model):HS650GN 紫罗红
尺寸(Size):600X600mm



型号(Model):HS617GN HS817GN 西亚红
尺寸(Size):600X600mm 800X800mm




应用产品: HS622GN

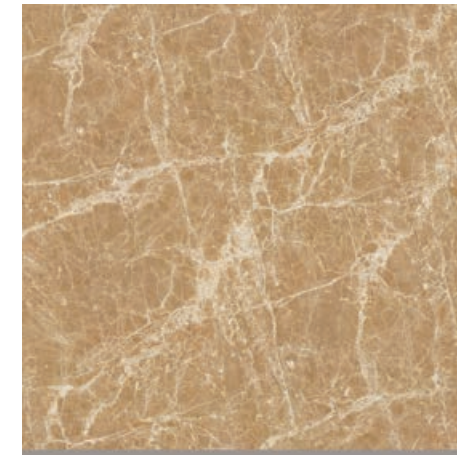


型号(Model):HS621GN HS821GN 浅啡网
尺寸(Size):600X600mm 800X800mm



型号(Model):HS640GN 浅啡
尺寸(Size):600X600mm

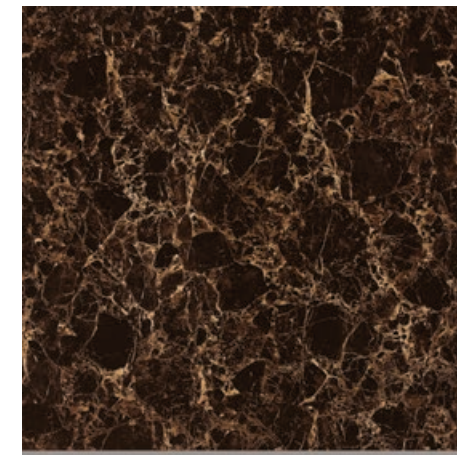


型号(Model):HS630GN HS830GN 深啡网
尺寸(Size):600X600mm 800X800mm

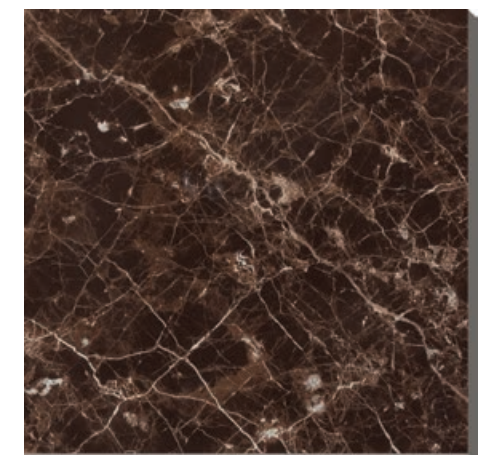

型号(Model):HS622GN 深啡钻
尺寸(Size):600X600mm




应用产品: HS610GN

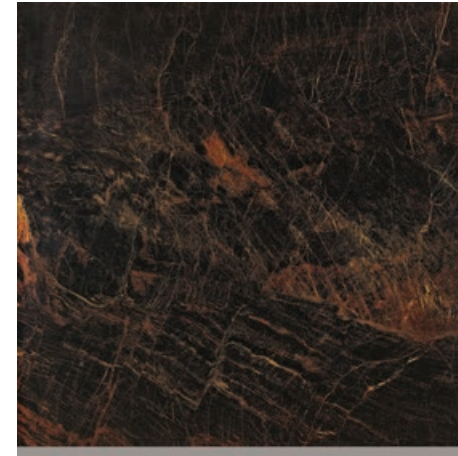

型号(Model):HS675GN HS875GN
尺寸(Size):600X600mm 800X800mm




型号(Model):HS610GN HS810GN 西亚黑
尺寸(Size):600X600mm 800X800mm

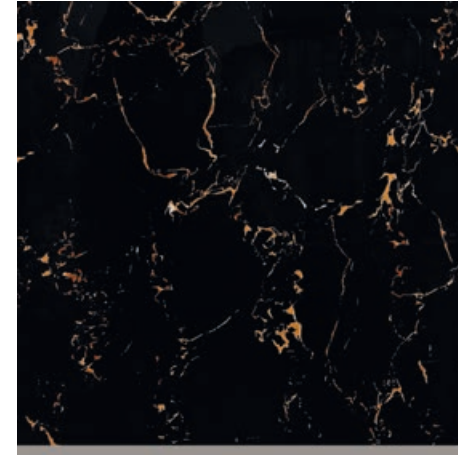

型号(Model):HS619GN HS819GN 黑金花
尺寸(Size):600X600mm 800X800mm



型号(Model):HS669GN 黑蜘蛛
尺寸(Size):600X600mm

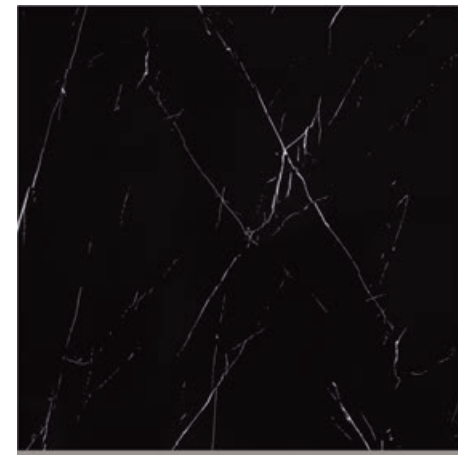


型号(Model):HS641GN 黑白根
尺寸(Size):600X600mm



型号(Model):HS629GN HS829GN 意大利黑金花
尺寸(Size):600X600mm 800X800mm

Factory view

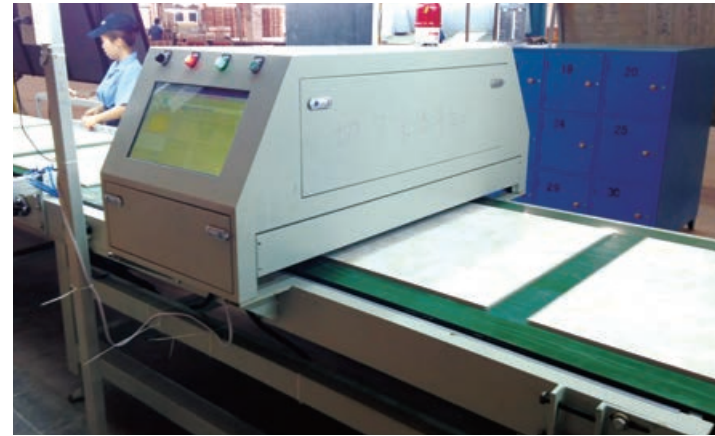

Packing and loading container



抛光砖铺贴方法

一、铺贴前的准备工作

- 1、首先选择有资质的熟练施工队，并把施工要求向施工方详细解释，以免由于施工的问题影响铺贴效果。
- 2、按设计要求、根据瓷砖编号、花色图案铺贴，如无规则图案的产品应根据砖底箭头方向铺贴。
- 3、产品若有任何不良状况请立即通知本公司处理，一经铺贴，恕难负责。

Preparation Before Construction

- 1、Select qualified and skillful construction team and explain the requirements,in details to avoid destroying the effect as a result of wrong construction.
- 2、Follow the requirements of the design,construct the tiles according to the item NO.,patterns and varieties,construct the irregular tiles according to arrow direction on the back of the tiles.
- 3、Please immediately notify our company in case there's any deflection to the products .We undertake no responsibilities after Construction.

二、施工时应符合以下规定

- 1、采用325#普通硅酸盐水泥干铺，水泥沙的体积比取：1：4-1：6之间，混合过程中水泥沙要拌均匀，结层厚度为20mm-35mm。
- 2、结合层与瓷砖应平整，用细鱼线打十字线找准水平。
- 3、铺贴时瓷砖的表面应保持洁净、平整、镶嵌正确，在调整砖面时用的橡胶必须用布包裹，防止橡胶沾在砖面；在用槌敲击砖时须120X400X12mm的干净木板隔开，避免槌直接撞击砖面而产生断裂或破损，铺贴过程中遵循设计要求，当设计未作留缝要求时，一般拼缝宽度应控制在2-3mm为佳。
- 4、瓷砖面层铺设后，其砖表面应加以保护，待结合层的水泥砂浆强度达到要求后方可用滑石粉除蜡进行表面清洁，清洁时最好选择专业的保洁队，在除蜡后用干净的棉布清理地面的粉尘，（切忌用湿润布拖擦砖面，避免污垢和水粘在砖表面难以清洗），然后再打蜡，建议每月保养打蜡一次，以保持产品的光泽度。

The Construction Shall Meet the Following Regulations

- 1、Apply 325# ordinary portland cement for dry construction, the proportion of cement and sands shall range 1:4-1:6,completely mix the above material to form a layer in thickness ranging 20mm-35mm.
- 2、The connective layer and tiles shall be even,level the with crossing lines.
- 3、The surface of the tiles shall be clean and even,correctly construct the tiles,cover the rubber hammer with fabric when adjusting the tiles, otherwise,the rubber may possibly adhere on the tiles; Isolate the tiles and hammer with 120X400X12mm clean wooden board when knocking,do not directly knock the tiles with hammer,otherwise the tiles may crack or break,Follow the requirements of design,if the design doesn't require to remain gap,it is recommended to control the gaps with 2-3mm.
- 4、After construction,the surface of the tiles shall be well protected, clean the surface with talcum powder after the strength of the cement mortar reaches the requirement,it is better to ask professional to cleaning workers to clean the tiles,after removing the wax on the tiles,please clean the dust on the floor with clean cotton cloth.(do not wipe the tiles with cloth,otherwise,the dirt may remain on the tiles),then polish the tiles,It is suggested to polish the tiles once every month thus remaining the glossiness of the products.

污垢类型 TYPE OF STAIN	清洁剂 CLEANING AGENT
日常清洁 Daily cleaning	洗洁精、肥皂水 Detergent, soap water
茶水、咖啡、冰淇淋、油脂、啤酒 tea, coffee, ice cream, grease, beer	纯碱溶液 Pure alkali solution
沉淀物、铁锈、灰浆 Sediment, iron rust, plaster	硫酸或盐酸溶液 Sulphuric acid or hydrochloric acid solution
油漆、绘图笔 paint, drawing pen	松节水、丙酮 Turpentine, acetone
酱油、醋、碳末 Sauce, vinegar, charcoal ash	酸或碱溶液 Acid or alkali solution
墨水 Ink	草酸 Ethanedioic acid
泥水 Mud water	亚麻子油 Linolenic acid

高度安全健康建材

耐污染 经1200摄氏度以上高温煅烧及特殊处理，使产品结构细密，吸水率低，砖面毛孔小，污渍难以渗入。

防静电 产品有去除静电作用，适用于任何有防静电要求场所的地墙装饰。

低辐射 坯体材料不含放射性氡气，经国家建材测试中心检测，符合GB6566-2001标准并达到A类要求，其使用不受限制、属绿色建材产品。

高耐磨 坯体经数千吨压机压制，再高温长时间烧炼，使产品硬度超过天然石材，而且防火耐酸碱。

High Degree Safety And Health Constructional Materials

pollution resistance-After the high temperature calcinations of 1200°C, the product has low water absorption and the pores of the surface are extremely small preventing the stains from penetrating.

Anti-electrostatics-The product has the anti-electrostatics function and is applicable to the wall and floor decorations where anti electrostatics are required.

Radiation-free-The body does not contain radioactive radon, and according to the test done by the national construction material testing center, the product does not contain the radioactive element.

High grinding durability The body has been pressed under thousands of tons, and has also been calcined under high temperature, durability surpasses natural stones, and also with functions of fire-proofing and resistance to acid and alkali.

抛光砖技术标准 Technical Standard

	产品执行标准 THE PRODUCT CARRIES OUTS THE STANDARD	标准要求 STANDARD REQUEST	欧洲标准 EUROPEAN STANDARD	维奇 布兰妮 VICKY BLANEY
吸水率 Water absorption	GB/T4100.1-1999	≤0.5%	≤0.5%	≤0.1%
破坏强度 Breaking strength 断裂模数 Rupture modulus	GB/T4100.1-1999	≥1300N ≥35MPa	≥27MPa	≥1800N ≥38MPa
长度 Length	GB/T4100.1-1999	±1.0mm	±0.6%	±0.1%
宽度 Width	GB/T4100.1-1999	±1.0mm	±0.6%	±0.1%
厚度 Thickness	GB/T4100.1-1999	±5.0mm	±5%	±3%
表面平整度 Surface roughness	GB/T4100.1-1999	±0.2%	±0.5%	±0.15%
边直度 Edge straightness	GB/T4100.1-1999	±0.2%	±0.5%	±0.15%
直角度 Straight angle	GB/T4100.1-1999	±0.2%	±0.6%	±0.15%
耐磨度 Wearing strength	GB/T4100.1-1999	≤175mm ³	<205mm ³	≤160mm ³
线性热膨胀系数 Linear thermal expansion coefficient	GB/T4100.1-1999		<9*10 ⁻⁶ K ⁻¹	<7*10 ⁻⁶ K ⁻¹
热振性 Thermal vibrability	GB/T4100.1-1999	经10次急冷急热循环后无裂纹 No cracks after 10 cycles of rapid cooling and heating	认可 Approved	经10次急冷急热循环后无裂纹 No cracks after 10 cycles of rapid cooling and heating
抗冻性 Frost resisting property	GB/T4100.1-1999	经5次冻融循环后无裂纹 No cracks after 5 cycles of frost resistance test	同EN176	经5次冻融循环后无裂纹 No cracks after 5 cycles of frost resistance test
光泽度 Glossiness	GB/T4100.1-1999	≥55		>60
放射性 Radioactivity	GB6566-2001.A类 GB6566-2001.A category	L _{Ra} ≤1, L _{Ir} ≤1.3		L _{Ra} ≤0.4, L _{Ir} ≤0.8